

UA-CR123A Crimp Seal 2/3 A

Technical Datasheet



Features

- Lightweight cells with stable output voltages
- High energy density
- Wide working temperature range
- Low self-discharge
(less than 2% after 1 year of storage at 20°C)
- High reliability
- 10 year shelf-life

Typical Applications

- Safety and security systems
- Metering systems
- LED flashlights
- Internet of Things (IoT) devices

Technical Specifications


Part No	UA-CR123A	
Cell Type	Primary, non-rechargeable	
Chemistry	Lithium / manganese dioxide	
Voltage Range	1.5V to 3.35V	
Nominal Voltage	3.0V	
Typical Capacity¹	1600mAh	
Max. Continuous Discharge	1500mA	
Max. Pulse Discharge	Up to 3000mA (life and temperature dependent) Varies according to pulse characteristics, temperature, cell history and the application. Consult ULTRALIFE China	
Energy Rating	4.8Wh	
Weight	17g	
Operating Temperature	-40°C to 70°C	
Storage Temperature²	-20°C to 45°C	
Humidity	65 ± 20%	
Exterior/Housing	Elastomeric wrapped, Ni plated stainless steel	
Terminals/Connector	Ni plated steel nub and flat contacts	
Size (maximums)	Length:	34.5mm
	Diameter:	17.0mm
Certifications	UL 1642 (file no. MH30127) UN 38.3	
Safety	This battery contains a Positive Temperature Coefficient (PTC) safety device to limit current during short circuit conditions	
Transportation³	Excepted Dangerous Goods UN3091: Packed with or contained in equipment Air Shipment: Packing Instruction 969 and 970, Section I	
	Class 9 Dangerous Goods UN3090: Bulk shipment Air shipment: Packing Instruction 968, Section IB	
Quality Assurance	Ultralife manufacturing facilities are ISO 9001:2015 and ISO 13485:2016 registered. Its products are listed under the Component Recognition Program of Underwriters Laboratories (UL) and have passed UN transportation testing, which is required for international transportation of all lithium batteries.	

Notes

1. Discharged using a 10mA load to 2.0V @ 23°C.
2. Cells should be stored in temperatures less than 30°C for a shelf-life of ten years.
Recommended Storage Conditions: Temperatures 5°C to 35°C and humidity <70% RH (to prevent self-discharge caused by corrosion or decrease of insulation). Storage at <-20°C can deform the plastic parts and may cause leakage.
3. For bulk shipments by air that are no more than eight cells and one package, this cell is Excepted Dangerous Goods and can be shipped under Packing Instruction 968, Section II.



Dimensions

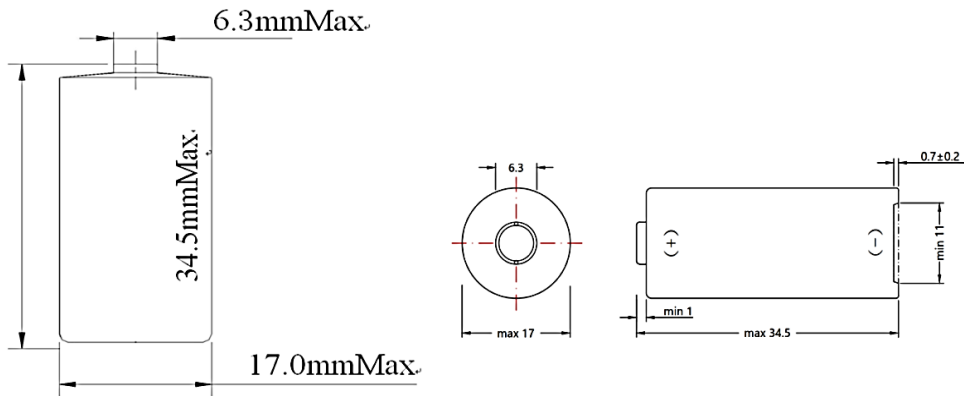

Unit: mm

Performance Graphs

